


Here is the bending curve of the RunnerExceed series loaded with a static weight of 3kg. 110H is although it is the same H class rod along with the 104H, it is more powerful and anglers will be able to comfortably cast 120g (max 130g) lures whereas the 104H cast weight is 80g (max 120g). If the 104H is a rod to bend and fight the fish, the 110H possesses the power to aggressively surface 15kg class Kingfish, yet having the light feeling similar to the 104H. This 110H can be said to be the new standard of power rods with its outstanding castability, lightness and power fused together.

The 103H is a model with a totally different concept, equipped with a powerful butt section ideal for use with both pencil type and popper type lures.



Runner Exceed FINAL STAND UP

Bending Curve / Load 5kg

100SXH

100SXH

100SXH

100SHH

100SHH

110H

110H

110H

Presented here are static load of 5kg loaded onto the RunnerExceed Final Standup models. Final Standup are the ultimate land-based models to target the GT and other monstrous species off the rocks and the 105BHH and the 1005HH follow in the footsteps. Please refer to the comparison below to check for power settings. The 103H, 100SXH and 105BXH are equipped with overwhelming power and stiffness while the 104H, 100SHH and 105BHH are composed of the Nano blank that helps anglers endure the thrashing of the fish by loading the rod and utilizing its repulsive force to lift the fish. The 100SHH is especially a highly repulsive model with the unique composition of different types of carbon material. Although it is a powerful model, anglers will easily be able to cast and control their lures while possessing a contradictory sharp feel to its flexible blank.





Shore Casting for Monster

Monsterimpact

Shore Casting /Blackfin-Seabass / BlueRunner / Red Eye / Seabass

The MonsterImpact series are developed to go after unsized targets and specific situations. We have eliminated any aspect of versatility, but have given it specialized power and taper to assist the anglers who are challenging their limits.

Both the 101HH and 110HH are powered series designed to target Blackfin seabass of the rugged rocks but is not the easiest rod to swing around

Anglers are usually placed at a disadvantage in rough sea conditions and terrain, but we have given the rods ample strength to not only target monstrous Blackfin but also withstand the brunt of unexpected Blue runners. You will be able to utilize various size seabass minnows and lures but the overwhelming power will not be suitable for anglers who have yet to establish their Blackfin fishing skills. However, once you are experienced and ready, we are positive that this rod will be a great asset to those anglers who have their sights on lunker size fish.

In the 2021 season, we have not only added the 90H spinning model for Seabass and Akame (Japanese Barramundis') utilizing heavy weight big-bait lures, but also the long-awaited power bait model of 91BH. The rods are exceptionally light for its power class and are easily capable of landing meter plus Akame and super-size seabass feeding on large size baitfish.

In addition, we have also produced a 4 piece 113HH model, giving a big advantage for anglers in the initial approach to the rocks or even travelling around the world.

The world for the MonsterImpact series has expanded with the addition of these new power models.



NEW MonsterImpact 91BH / Bait Model

The blank of the 91BH has been shaped for accurate casting and controlling of big bait plugs up to 130g. Although it is a power class model, the sensitive blank will transmit the minor existence of 20g class minnows and will allow easy control. It basically has the same concept as the 90H spinning model but has a greater range of lure usage and allows anglers to utilize thicker and longer leader systems advantageous in bait-tackle settings. The direct controllability of the lures and consistent casting accuracy will surely help you further enjoy your big-bait game.

NEW MonsterImpact 113HH / 4pcs / Spinning Model

The 113HH is a powerful pack-rod which allows easier access to your fishing grounds to target Blackfin seabass and Blue-runners. The short 90cm separate length can be stowed in your backpack and by freeing both hands of any rods will help anglers safely reach some of the more remote and dangerous land-based fishing grounds. It is a versatile rod able to handle small minnows to medium size diving pencils with a seamless bending curve rarely seen in any 4 piece rod. The rod possesses contradicting qualities of both power in the butt section to stop the run of monstrous fish and flexibility in the belly section to avoid any hook offs. While being highly resilient this regular tapered blank will show its true potential in the most critical time. The MonsterImpact 113HH/4pcs rod comes with its own special rod bag and a useful neoprene rod bag for your fishing trips. The rod also fits nicely onto the RippleFisher waterproof backpack.



The MonsterImpact 113HH/4pcs rod comes with a special rod bag as well as a neoprene rod cover useful when trekking through bushes to get to your fishing grounds. It also fits perfectly on the rod holder of our RippleFisher waterproof backpack.









MonsterImpact 90H/Spinning Model

This is a specially tuned seabass model to easily cast through with big-baits (70g) and even small minnows from 20g. The butt section has been enhanced to easily stop lunker size seabass and Red-Eye (Japanese barramundi) that are feeding on large bait-fish (Sardines, gizzard shad, and mullets). We aimed to produce a rod where anglers will be able to enjoy casting large plugs a great distance. We present this ultimate spinning rod for the ultimate spinning anglers.

MonsterImpact 101HH Nano/Spinning Model


Like the 110HH, this rod is also designed to target both the black-fin and blue runners but this 101HH is set more towards the blue-runners. In other words, it is for anglers who are targeting blue-runners and might want to also cast out a few small lures for the black-fin. The short length 10ft linch and its short grip has been set for use around flat rock formations, to increase the casting accuracy and balance. Although it is a rod for the black-fin, it can also be used for situations where the bait-fish are extremely small when targeting the blue-runners with smaller lures.

MonsterImpact 110HH/Spinning Model

This model has been designed with the power to overcome both the blue-runners and the black-fin seabass. It is not simply a harder and stiffer rod, but will bend tenaciously with the sudden run of the Kingfish. It is also ideal for fishing in heavy seas and strong head winds to target the monster class black-fin. Although it is a powerful rod, the tip section has been build with some flexibility for anglers to punch out those smaller lures. The belly to butt section of the rod is a HH class and has the strongest power of the lineup.

MonsterImpact 110HH HIRA / Bait Model

This is the highly responsive bait-casting Hirasuzuki (Black-fin seabass) model with great casting capabilities. This HIRA bait-casting model is composed with light weight grip and guides to improve its balance, casting accuracy, lure and fish controllability, while being delicate and powerful at the same time. We present the holy grail of fishing rods to the hard-core anglers who strive to pursue the bait-casting style for their Hirasuzuki game.

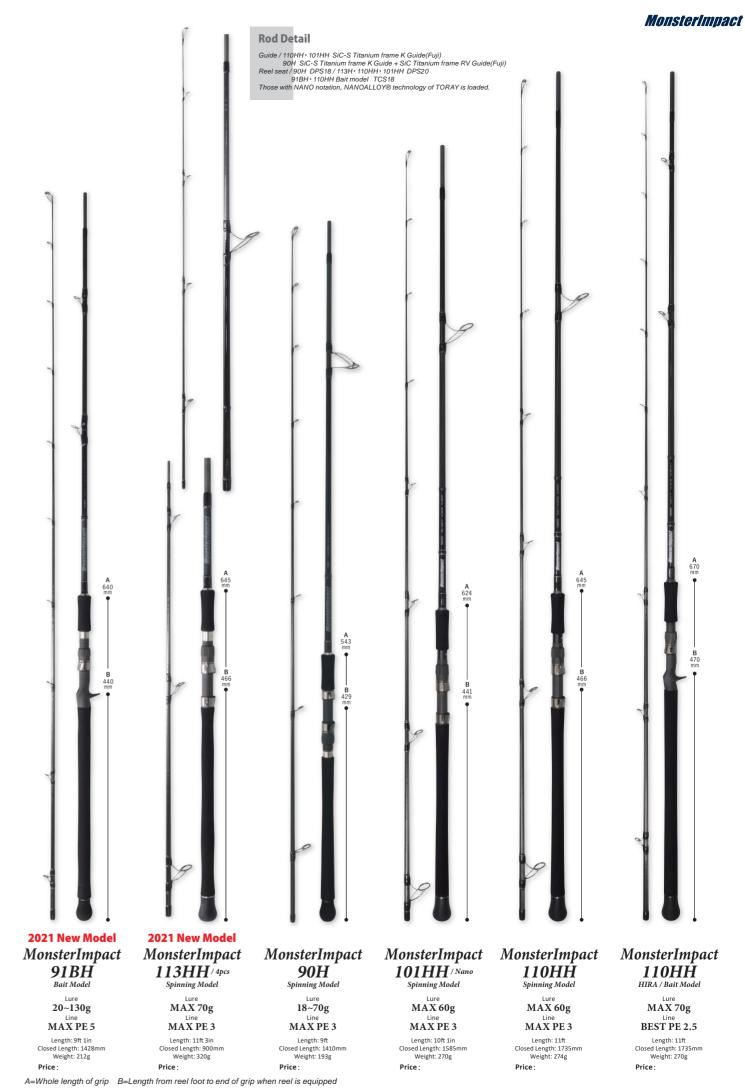





Shore Casting /Black fin Seabass

The Black-fin seabass game is conducted under harsh environmental conditions with strong head winds, heavy swells, complicated currents and uneven footing. The anglers have little advantage in these unforgiving conditions and the only way to overcome these factors are experience and the ability to analyze and make an efficient/good judgment in a given situation.

We have added the sharpness by employing the Nano blank while fine tuning the standard capabilities as a black-fin seabass rod.

Anglers will cut through the strong head winds and sew through the complicated currents. The highly sensitive blank will allow anglers to notice the subtle changes in current and flow to inform you of bite spots. Each model in the lineup has its own developmental concept. Starting with the controllability and lightness of the 103, the 110M is the standard model focusing on its outstanding rod balance. The 106MH is ideal for more technical and powerful approach while the 110H is for anglers who seek absolute power and sharpness.

Based on the blackfin seabass games foundation to "skillfully handle", we have re-engineered the pattern and with the introduction of new material, Ripplefisher is proud to release the model fused with a sharp and light feeling.



Avarice 110M Nano

blackfin seabass with the most up to date engineering technology at Ripplefisher. It possesses a highly sensitive characteristics required to transmit the short bite of the blankfin seabass, while the flexible blank bends in to reduce hook offs due to straightening of fragile hooks. The blank which possess the contradicting characteristics of flexibility and sharpness, allows anglers to sharply cast lures ranging from 10cm to those larger 40g lures. This new standard rod is not only suitable for monster class blackfin seabass, but also 5kg class blue runners and snappers off the rocks.

Avarice 103M Nano

This 103 length is light, easy to handle and is efficient when fishing from low rock formations or bolder rocks for the black-fin seabass or the normal seabass off the rocks and fishing from the surf for flounders. Although it is short in length, the blank will bend nicely to withhold the fish. This is a new generation of Black-fin seabass rod with the combined properties of long casting, butt power and the newly added element of light/easy handling.

Avarice 106MH Nano

It possesses a stronger butt section compared to the 103M and with its refined taper design, it maintains the easy handling of the rod while improving its castability. The bigger the fish on the other end of the line, the more power it will exert, constantly applying pressure on the fish to efficiently surface it. You will be able to first handedly experience how the carbon material has evolved from this 10ft 6inch blank packed with castability, loading power and controllability of the fish.

Avarice 110H Nano

This is an almighty rod with its ideal length and power settings for use anywhere, anytime. It is capable of cutting through strong head winds, while having the ability to cast small lures to pinpoint accuracy and not to mention its overwhelming butt power. The Nano blank characteristics can be noticed in the contradicting nature of its sharpness when casting and its ability to bend nicely once it is loaded.

Rod Detail

Guide / SiC-S Titanium frame K Guide(Fuji)
Reel seat / 103M DPS18(Fuji) 106MH • 110H DPS20(Fuji)
NANOALLOY® technology of TORAY is loaded.





MAX PE 2.5





The Avarice series are specially designed models for Blackfin seabass fishing but all models have exceptional butt power to go head-to-head with the unexpected Blue-runners or massive snappers that may take an interest in your lure off the rocks. The major difference from the MonsterImpact series is the ability of the Avarice series to appropriately follow through the bite when reeling through strong currents and the ability of the MonsterImpact is to efficiently respond to the anglers maneuvering of



A=Whole length of grip B=Length from reel foot to end of grip when reel is equipped

MAX PE 2

Length: 11ft

Weight: 213g

MAX PE 2

Length: 10ft 6in Closed Length: 1640mr

Weight: 219g

MAX PE 1.5


Length: 10ft 3in

Weight: 198g

12






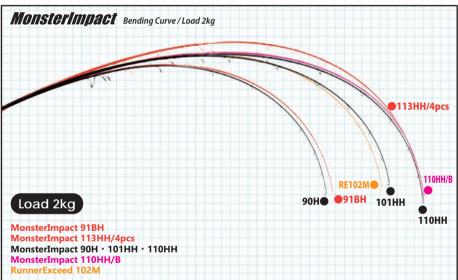


Here is an illustration of the 6 models in the MonsterImpact series with a static weight of 2kg. The two new modes in 2021 of 91BH and 90H are designed for big-bait lures for lunker size seabass and Akame but have a light feeling like a seabass class rod. The 4 piece model of the 113HH is the most powerful of the lot with added strength and sharpness for Blackfin seabass and Blue-runners as its main targets.

The other 101HH, 110HH and 110HH/B models are also

The other 101HH, 110HH and 110HH/B models are also developed to target both Blackfin seabass and Blue-runners. The 110HH and 110HH/B have the sharpest feel while possessing both power and tenacity. The 101HH is a similar power class to the above mentioned rods yet being more tenacious and bendy



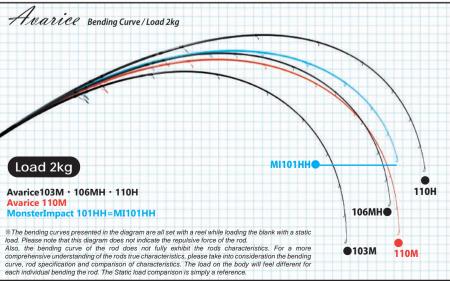

Here are the bending curves of the Avarice series designed for blackfin seabass, loaded with a static weight of 2kg. As a reference, we have also included the MonsterImpact 101HH. The 110M is the long length power up version of the 103M. If you consider the 106MH and the 110H as having sharp casting for pinpoint shooting and being power models, you can say that the 110M is more flexible yet possessing the sharpness. The 103M is the most flexible and bendy of the series ideal for fishing around flat rocks. The 106MH is your standard blackfin model, with an extremely strong butt. The 110H is a model for use in tough field conditions and is easily able to surface blue runners in the 5kg class. When comparing the 110H and the MonsterImpact 101HH, the butt power of the 110H is evidently stronger but the tip section is delicate for use with smaller minnows.





Seabass and more

SilverStream

Shore Casting /Seabass / Flat Fish / Cherry Salmon / Others

SilverStream has a lineup for various land-based fishing. "Stiletto" is a special model that has sharpened the high sensitivity performance to the limit. "Northern" which targets sea trout and sea salmon.3 models in the Flows series to decipher the intricate current from its super sensitivity, 2 models in the Red-Eye series for the monstrous seabass and Akame (barramundi) and now the 2 models in the Northern series for use with metal jigs or jig-minnows to target the sea trout or sea salmon consist of our SliverStream lineup. There is no power class in the series, and all have unique characteristics for the different species but there is one thing in common. That is the absolute butt power to deal with the lunker size targets. The SilverStream series are models which will perform to its limits depending on the anglers' needs and usage.







SILVERSTREAM / SEABASS AND MORE



SilverStream 81 Stiletto

The SivlerStream 81 Stiletto is a super delicate and ultra sensitive specialized model built up with all 40t carbon materials. This ultra sensitive blank will transmit the slight changes in the flow of water and the drag against the lure, allowing for a swift hookup once the angler feels any subtle bites. The rod is ideal for nighttime wading where anglers are blind and require all senses in their hody to feel for that change in current. Also when the target species are selective or feeding on small baitfish, this rod will assist anglers at the most critical times. If anglers have a clear goal and method, this rod will be you best weapon. The all 40t carbon blank not only allows anglers to cast out lures up to 28g but also enables the use of lighter (8g) sinking pencils while maintaining the sensitivity and controllability. This ultra sensitivity not only transmits the sharp "bite" type information efficiently but also the softer and more subtle information of "water flow". Our objective was to create a rod, which drastically reduces the time lag between the "bite" to the "hookup". In other words, the Stiletto is a super "high speed" rod that allows anglers to respond quicker through the ultra sensitive characteristics.

SilverStream 810 Flows Nano

The 810 Flows is the core model of the series with its ideal length for seabass fishing equipped with a strong butt power. It is especially outstanding with its casting swing through and high sensitivity. Anglers will be able to decipher the subtle difference in current movements while maintaining the high response required for an efficient and effective hookup. It may seem a little too stiff when anglers initially take a hold, but once you are out in the field casting, retrieving and fighting the fish, it will bend nicely. With its high tolerance, the butt will still hold extra power even when fighting a monstrous seahass

SilverStream 96 Flows Nano

The 96 Flows is designed for use in large river systems, estuaries, surf casting and wading in the flats which require long distance casting of large lures. The balance of the rod is outstanding and anglers will not notices its 96 length. It also possesses a highly sensitive blank to feel for the slight change in currents. The 810 is a type of rod to conquer the current, where as the 96 is designed more to feel for the changes in current far away. The lightish tip section will allow anglers to not only utilize large lures but also various smaller minnows and vibration type lures. The concept for the Flows 96 is "distance" and "sensitivity"

SilverStream 103 Flows Nano

The Flows 103 is a model designed for use off the rocks and surf casting which require the power and sharpness to cut through the strong head winds. It allows anglers to easily cast and trace smaller lures which weren't possible with the stronger black-fin models, while also having the power required to swing through with heavier lures. Even with its long length, the blank made up with the new NANOALLOY® technology has enabled the rod to maintain its sharpness. The unique characteristic of the Nano blank also exerts the underlying power once the rod is loaded with a lunker size fish off rough rocks and heavy seas.

SilverStream 87 RED EYE Nano

The 87 Red-Eye is a power rod we present to anglers targeting the monstrous seabass and the infamous Akame (Japanese red-eve barramundi) inhabiting the Shimanto River, It is not simply an over powered rod, but possesses a flexible tip enabling anglers to cast and control small to large minnows. The blank is tolerant and will lift the fish with its repulsive force while having great casting capabilities of large lures with the least amount of effort. Furthermore, the 87 is designed with a short length grin for easier usage in the wading game

SilverStream 97 RED EYE Nano

In contrast to the $87\ \text{Red-Eye}$, we have increased its power, ability to load the rod and castability. Although its concepts are the same as the 87, with the combined attributes of sensitivity and power, this model is most suited for a more extensive field. It's ideal to rip out massive Red-Eyes, but also seabass off the rocks, black-fin seabass nearing the estuaries, and lunker size seabass lurking around the tetrapod's. The response and high sensitivity required to instantaneously pull away the monstrous fish off the structures have been finely honed through the use of Nano



SilverStream 106 Northern Nano

This model is ideal to cast metal jigs and jig minnows up to 50g in weight from rocky headlands and technical rock formations, which require a quick and tricky cast and retrieve. With its sharp characteristics, anglers will be able to cast accurately while controlling the jig at ease. Having said that, the rod will bend nicely once the rod is loaded and will prevent any loss of fish from the targets lip ripping. Furthermore, it possesses the butt power to aggressively stop the violent fish from diving into the rocks and structures. *For anglers who prefer to use minnows when fishing in the surf, we recommend the SilverStream 103 Flows Nano or Avarice 103M Nano.

SilverStream 112 Northern

The 112 Northern is a sharp rod designed for long distance casting and will enable anglers to cast out metal jigs and jig minnows up to 60g from the surf and other major points by utilizing the whole rods repulsive force in strong head and side winds. With its high sensitivity, this rod will become your ultimate weapon when the fish are far and you need to search a vast area. Furthermore, the long rod length will help you avoid any rocks or structures near by and it also possesses the butt power to rip off the monstrous flounders from the seabed. **For anglers who prefer to use minnows when fishing in the surf, we recommend the SilverStream 103 Flows Nano or Avarice 103M Nano.



Rod Detail Guide / Flows • Stiletto Series TZ Titanium frame K Guide(Fuji)
Rest of all SiG-S Titanium frame K Guide(Fuji)
Reel seat / Stiletto Series DPS17 Northern Series DPS20 Rest of Those with NANO notation, NANOALLOY® technology of TORAY is load. Rest of all DPS18(Fuii) SilverStream SilverStream SilverStream SilverStream SilverStream SilverStream SilverStream SilverStream SilverStream 81 810 96 103 106 87 112 RED EYE / Nano RED EYE/Nano Stiletto Flows / Nano Flows / Nano Flows / Nano Northern / Nano Northern 30~60g 30~50g MAX 32g MAX 42g MAX 40g MAX 45g 7~28g MAX 38g **MAX PE 1.5** MAX PE 2 MAX PE 1.5

MAX PE 2.5

Length: 9ft 7in

Closed Length: 1505mm

Weight: 193g

Price:

MAX PE 1.5

Length: 10ft 6in

Closed Length: 1640mm

Price:

Weight: 220g

Length: 11ft 2in

Weight: 255g

Closed Length: 1754mn

Price:

SilverStream

A=Whole length of grip B=Length from reel foot to end of grip when reel is equipped

MAX PE 1.5

Length: 9ft 6in

Weight: 166g

Closed Length: 1490n

Price:

Length: 10ft 3in

Weight: 196g

Price:

Length: 8ft 7in

Closed Length: 1350m

Price:

Weight: 158g

MAX PE 1.5

Length: 8ft 10in

Weight: 160g

Price:

PE 0.6~1.2

Length: 8ft 1in

Weight: 126g

Price:



Light Game

RealCrescent

Shore Casting /Horse-mackerel / Rock Fish / Seabream


The "Real Crescent" series have been finely honed to further enjoy the deep and technical light game fishing.


They are equipped with the controllability and sensitivity to appreciate the technical jig-head games and also possess the power for anglers to enjoy targeting rockfish and bream. With the easy and light usability, anglers will be able to appreciate the sharp and powerful blank it

The high sensitivity, lightness, its beautiful bend curve and power will respond to each angler's needs for the light game. The new Real Crescent series are the next generation of basic light game rods.

We have carefully selected 4 models in the spinning and 3 models for the bait casting tackle. All models are highly versatile with the potential to target various species in various fields for the light game. We hope you can experience our Real Crescent models to strive for the next stage in light game fishing. (All models equipped with Torzite K guides and NANOALLOY® Technology blank)




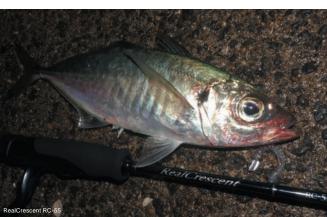

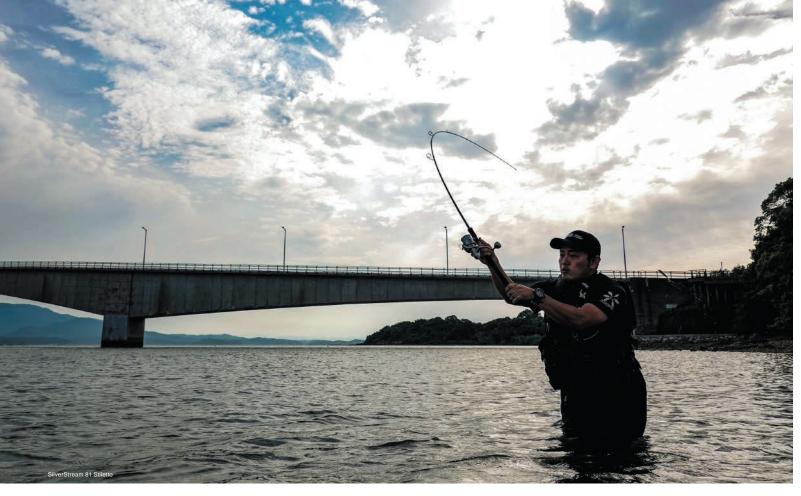





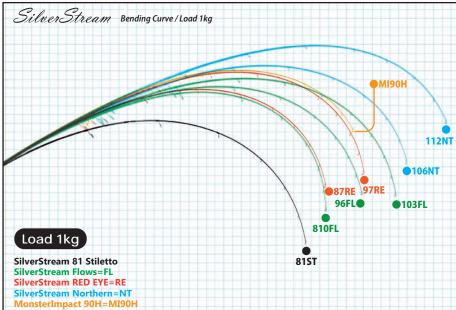

Here are bending curves of the SilverStream series loaded with a static weight of 1kg. The 81 Stilleto is a high speed model to hookup the shortest bites through the super sensitive and super resilient characteristics built up with all 40t carbon. The 2 models of the Northern series are stiff rods built to cast heavy weight jigs and jig minnows, yet possessing sufficient flex to hookup the sea trout. The 3 models of the Flows series are all built to target seabass. The 810 is a regular to fast tapered highly sensitive model. The 96 is a stiff model suited for long range casting and the 103 is the long length model also able to target Flounders. The Redeye is a power model, designed to target both the seabass and Akame (Japanese barramundi) with a resilient and bendy characteristics. For your reference, we have also displayed the highly powerful MonsterImpact 90H suited for use with big lures. To cast with the Redeye, you can load the blank with the weight of the lure, whereas for the MI90H, you can cast by increasing you swing speed and utilizing the blanks stiffness/power









REALCRESCENT / LIGHT GAME



RealCrescent RC-55 / Spinning Model

This is an ideal model for use with a simple jig-head rig. Overall, it has a sharp feeling to it, but with the use of the NANOALLOY @ material, the highly repulsive nature of the blank will bend nicely during the cast. The highly sensitive characteristics of the blank will not only transmit the information on the bite but also the subtle water pressure differences through the blank. Anglers will be able to utilize PE, nylon, fluorocarbon and ester lines.

RealCrescent RC-65 / Spinning Model

This is the standard model that stands as the core for the spinning model. Anglers will be able to experience a seamless usage through the fast tapered rod with a flexible tip, resilient belly and strong butt section. It is a versatile rod for use in various fields with the use of simple jig-head rigs, plugs, Carolina rigs and even light wind techniques.

RealCrescent RC-75 / Spinning Model

It possesses the sharpest feel of the blank in the Real Crescent series for use in not only Aji and Mebaru (Rock fish) targets, but also for various species of rockfish, bream and for the light seabass game. The sharp tip section will transmit the vital information on the current while enabling anglers to use Carolina rigs, Texas rigs, plugs and metal jigs with a high response. The strong butt section of the rod can deal with the unexpectedly large rockfish and bream measuring over 50cm.

RealCrescent RC-81 / Spinning Model

This is a long length model designed mainly for use with Calorina rigs and floating rigs, but is also great with $3{\sim}5g$ jig-heads. Compared to the RC-75, the stiffness of the tip section has been reduced for a lighter feel when in use. With its highly sensitive nature, it is an ideal rod for anglers to search the deeper area at great distances.

RealCrescent RC-57 / Bait Model

Despite the stiff characteristics of the blank to exhibit the nature of a bait-casting model, it is a finesse model with an outstanding cast-feel. We have designed the rod so anglers can easily load the rod to cast with jig-head rigs weighing less than 1g. It is also ideal for fishing styles that require sensitivity during the retrieval, such as dead slow retrieval of super light lures.

RealCrescent RC-67 / Bait Model


This is the most basic model for the light game bait casting-tackle fishing. With the fast tapered flexible tip section and stiff belly to butt section, anglers will not only be able to cast and control light jig-head rigs but also utilize various rigs, plugs, and metal jigs stress-free. This next generation light game rod will enable anglers to capitalize on the biggest asset of the bait-casting reel by releasing the clutch while using the lift and fall techniques and drifting techniques.

RealCrescent RC-77 / Bait Model


This is the middle class bait-casting model to target various species of rockfish, bream and seabass. It is an ideal light game rod to cover various species and fishing styles using "bottom-dragging", "lift and fall" techniques with plugs to induce those reaction bites. The whole rod has been designed to be stiff to the tip, enabling anglers to cast lures up to 15g and rip those monstrous fish off the bottom with its outstanding butt power.






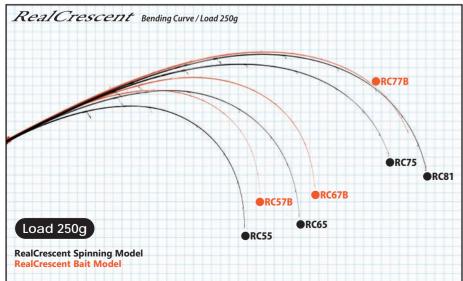

On the left, you can see a comparative diagram of the bend curve of the Real Crescent series with a static load of 250g. The most basic light game model is the RC-65. The RC-55 is designed for use with a singular body jig-head and the RC-75 is for use with Carolina rigs and metal jigs. The RC-81 seems to be the strongest rod but able to utilize a variety of lures with flexibility of the whole rod. As for the bait-casting models, the RC-57 is designed for use with singular body jig-heads and the RC-67 is ideal for both the jig-head and small lures. The RC-77 is the stiffest model of the series, suited for bottom knocking and dragging techniques to target rockfish and bream game. In the diagram, you may notice that the RC-81 and RC-77 have a similar bending curve and power, however they have a totally different characteristics with the 77 being much stiffer while the 81 being more flexible.



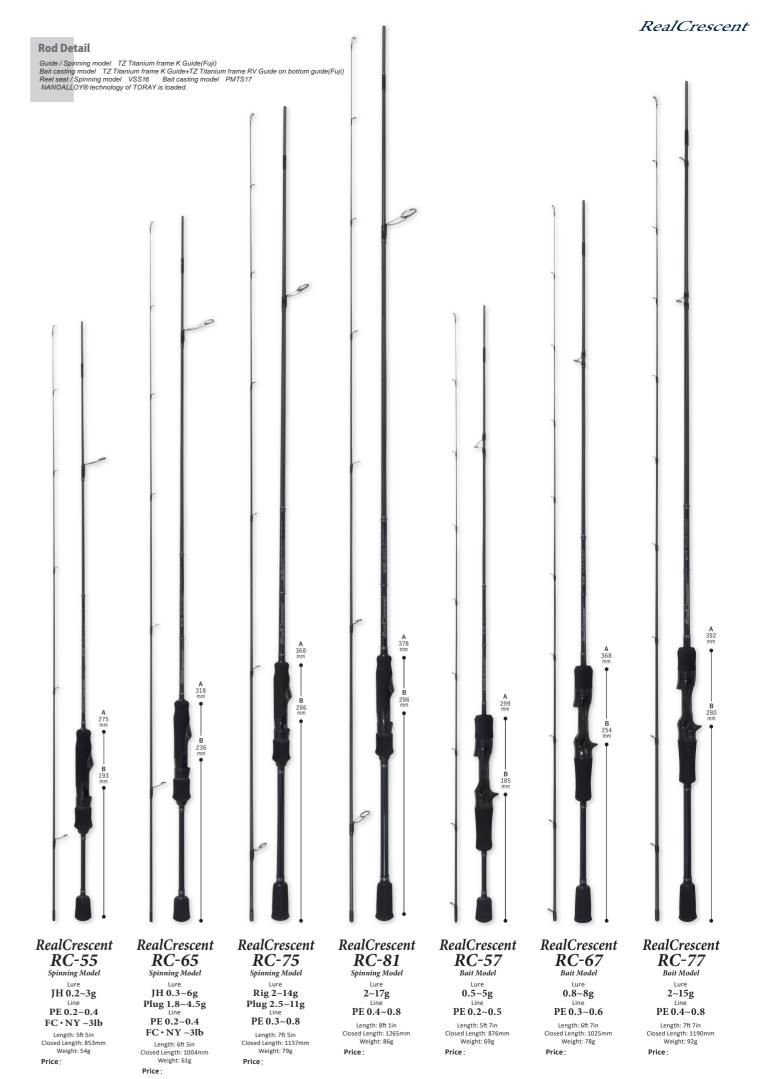

A=Whole length of grip B=Length from reel foot to end of grip when reel is equipped



RippleFisher Color Custom

Ripple Fisher's products can be ordered in custom colors, except for some limited edition products. The custom options are limited to "the blank color", "the thread pin color" and "the thread set color". Please choose the color options below for you custom color.

*Please note that we do not accept custom request to change grip or guide options.

Blank Color

You can order color customization either whole blanks (from butt to top guide) or butt section only(range of model logo). Please select color from the chart.

If you customize butt section only, rest of blanks of it will be finished in original color.

The prices will differ from the standard colors (01~08) to the "Maziora" color (09 \sim 11).

*You can only select one color. We cannot accept requests for gradation, matt finish or changes between two colors. *If you choose the 08 (silver color), the logo print will be

(Custom Charge)

Blank Color Custom 1pc model Full Paint Color: 01~08 10.000Yen Color: 09~11 15,000Yen *The grip joint model also same price as 1pc model

- •2pc model Full Paint Color : 01~08 12,000Yen Color: 09~11 18.000Yen
- Color: 01~08 13,000Yen 3pc model Full Paint Color: 09~11 19.000Yen •Only Butt section Paint Color: 01~08 6,000Yen
- Color: 09~11 9,000Yen • Multi Shaft Color: 01~07 15,000Yen

**Silver color orders are not accepted for Multi shaft


%Please note that we have been trying to our best but the color of this chart may differ from acutual color. It is also depend on type and setting of your moniter if you check it on web site. Thank you very much for your understanding.

01.Metal Smoke 02.Metal Ice Blue 03.Metal Blue 05.Metal Pink 06.Metal Red 07.Metal Orange 08.Silver 09.MAZIORA ANDROMEDA (Green base) 10.MAZIORA PLREADESII Color: 09~11 20,000Yen (Blue base) 11.NEW MAZIORA TRAPEZIUM (Orange base)

**04.Metal emerald blue is out of print and is a missing number. 11. Maziora Trapezium is a new color.

Blank Color • About coating range



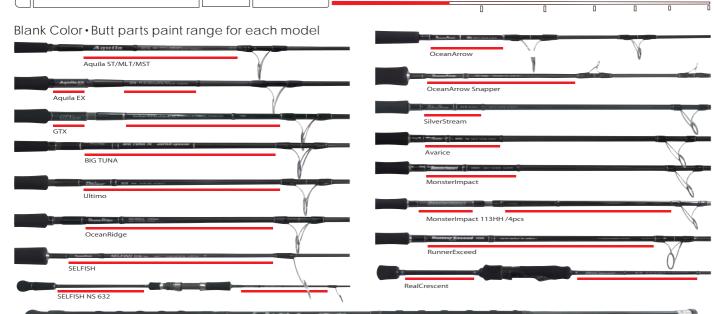

*The color customization of the multi-shaft is only for the painting of the main body, and other part is not available the service

Thread Pin-Color

●The "thread pin color custom" designs will comply with the original product's position. *If two colors are used in the standard product, a single color will be used for the custom color.

*If you order a "thread pin color custom", the whole rod will be customized with the color you ordered. **The thread color of the multi shaft cannot be

(Custom Charge)

Thread Pin color custom Color: 01~07 2.000Yen

Color: 08 (No pin thread) 1.000Yen

How to order for color customization

Select models

Change color of blanks or not

Select color and range (If unnecessary please go next) Select color of thread (If unnecessary please make an order)

Select color of "Pin" or "Set" thread

Make an order to retail shop or officail agent

01.Silver 02.Champagne Gold 03.Metallic Red 04.Metallic Copper 05.Metallic Pink 06.Metallic Blue 07.Metallic Gray 08.Black

Thread Set Color

Thread/01.Red Set Custom as an example *Main color · Red/Sub color · Black

Thread for decorations will be main color Logo print part

For custom thread set colors, you can 01 choose the thread colors (for guides and butt section) from the following set colors. The set colors comprise of the main color and the sub color. We do not accept requests to change around the main color and sub color.

 $\ensuremath{\%}$ Depending on the model of the rod, the color of the thread presented on top will differ if there is a under thread. Please refer to the sample pictures on the right. (for the heavy game rods, there is a thread underneath the guides. For light to medium game rods, most models do not have this thread underneath the guides.)

*We do not accept requests to change or alter the color of

*The thread color of the multi shaft cannot be changed

(Custom Charge)

Thread set color custom Color: 01~10 5,000Yen

Delivery date


With regards to your custom order delivery date, it will take roughly 5 - 8 months depending on our production schedule.

(As a rule of thumb, we will set an order closing day on the 20th of every month,


so it's about 5-8 months for delivery date from the order month.)

Changes and cancellation of custom order

Please note that basically we do not accept changes or cancellations of custom order after a month have passed since we have received order from retail shop or official agent. Thank you very much for your understanding.



01.Red Set (Main · Red/Sub · Black)




02.Pink Set (Main · Pink/Sub · Black)



03.Gold Set (Main · Gold/Sub · Black)



04.Blue Set (Main · Blue/Sub · Black)




05.Light Blue Set (Main · Light Blue/Sub · Navy)




06.Purple Set (Main · Purple/Sub · Black)

Under thread applied model


*No under thread applied model, main color (Red on 01) comes on top




07.Emerald Set (Main · Emerald/Sub · Black)



08.Lime Set (Main · Lime/Sub · Black)



09.Light Gray Set (Main · Light Gray/Sub · Dark Gray)



55

10.Sky Blue Set (Main · Sky Blue/Sub · Dark Blue)




NEW RF Land based Fishing rod bag

nis is an ideal rod bag to store your rods when going on land-based fishing trips. We have given the bag ample strength for hard use on the rocks and handling on the boat when jumping off on to the rocks. It can stow 3-4 long big game rods (RunnerExceed Final Standup etc.)
Furthermore, it is able to fit the RF multi shaft and other goodies you may want to take on fishing trips.







Ruble Fo

We have also arranged our jackets to have durable material under the armpits to reduce any wear and tear from fishing with the grip-end under your armpits. Water pressure resistance: Over 294kps (30,000mm) · Moisture permeability : Over 16,000g/m² 24H (B-1) Color · Navy · Khaki · Orange Size: M·L·O (XL) ·XO (XXL)



The ON-YO-NE Breathtech (3 layer) is a material specially bound together by 3

nermeable material will belo release the heat and moisture built up inside the jacket



Model: Stream Trail / DRY TANK 60L D2 Size: W39×D34×H62.5cm Capacity: 60L Material: Tarpaulin, polyester (bag body) Color: Black





Khaki • Back







Left cuff print

The new 2021 T-shirts have been made by

Heavy weight Long sleeve T-shirt

NEW RF Original

0

It is a long sleave T-shirt with a strong and rough texture thanks to the Open-end material used. It's a thick 7.1oz material and will wear-in nicely as you

Material: Cotton 100% Open-end yarn 7.1OZ Size: M · L · XL · XXL Color: Black / Mixed Gray

RF Original T-shirt 2021

material is "lack of twist", "non-transparent"

what is called a "semi-combed yarn" and is Material: Cotton 100% the category between the "card yarn" Semi-combed yarn 5.6OZ Size: M • L • LL • 3L normally used for T-shirts and the "combed yarn" which is a higher grade glossy material. The 3 major characteristics of this Khaki • Charcoal • White



and "long lasting"



Charcoal · Back ←The front has a ripple tag sewn on the bottom right without printing

on the large size, you can stow away the small one inside. Both large and small have a rubber line stopper at the end to secure your line. It not only functions as a knot tightener but also comes handy as a line breaker in an event of a snag Size: L Size Length 174mm • Diameter 25mm

RF Knot tightener (2pcs/Set)

This is RippleFishers original Knot tightener to put

the final touches for your line system. The small and large size comes as a set and once you open the cap

※ If rubber material on main body have been worn out please get in touch with retailer or agents in your region.





Size · M • I • I I • 3I

Color: Navy · White · Black

Color:Black

RF Self-inflating Life Jacket

Pouch type BSJ-4320RSE Size:Free





Material: Acrylic80% • Wool20% Size: Free Color: Black • Dark heather • Navy

with each cap.


RF Original Dry polo shirts

RippleFisher orijinal polo shirts made of dry fabric. Excellent sweat absorption and fast-drying thanks to material of dry fabric which is 100% polyester.

It have also UV protection effect and keep you nice and dry even if you get sweat. We recommend you to layer on under wear.





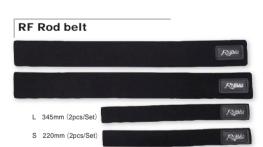

Dark heather

NEW RF Flat visor cap Snap back for adjustment is chosen and reverse of

2 of Ripple Fisher orijinal sticker for visor will comes

visor is standerdized in green.

RF Embroidery Emblem

2 kind of round style 2 colors for each size of Square style.

Round 2 types: Diameter Square L Size: Navy • Black

Square S Size: Navy · Black

Riple Fisher







RF Cutting sticker Riple Fisher

←17cm 8Colors · NEW Neon orange

· NEW Neon pink

· White · Blue

· Pearl White

· Silver · NFW Gold

· Silver Pink Copper

Blue

· White · NEW Gold

60cm 5Colors

Blue

White

Pink

 Copper Silver

80cm 2Colors · White · Blue



Ble Fish



2021 RippleFisher Rod Line-Up Spec Details

-2021	New	Model	

	appier isii	C. 700			p															:	
	Series	Price	JAN CODE	Sec		Lt feet]	CL-Lt [mm]	Wt [g]	Lure	Line	Drag Max	Guides	Reel Seat	Lock	Joint	Grip End	Carbon (%)	Tip [mm]		Position [m]	Suitable reel size
	85F JAPAN Special		4580397945147	2	_			370	18 ~ 120g	Pe 3 ~ 6		SiC-S/Ti/K+0C	DPS20	D	CI	BRC*			14.3	-	S·D:8000~14000 / D:4500~
F				_		ft 5in	1880				-				GJ			_		:	S·D:14000~18000 / D:5500~
- H	83 JAPAN Special		4580397948087	-	_	ft 3in	1785	409	40 ~ 150g	Pe 6 ~ 8	15kg/45°	00	DPS20	D	GJ	BRC%	93.2	_	_	915	
F	85 JAPAN Special		4580397945130	_	_	ft 5in	1850	434	40 ~ 160g	Pe 6 ~ 12	15kg/45°	OC	DPS20	D	GJ	BRC*	94.4			895	S·D:14000~20000 / D:6500~
-	710 JAPAN Special		4580397945116	\rightarrow	_	t 10in	1672	393	40 ~ 160g	Pe 6 ~ 12	15kg/45°	OC	DPS20	D	GJ	BRC*	92.9			910	S·D:14000~20000 / D:6500
Į.	76 JAPAN Special		4580397945215	_	_	ft 6in	1575	398	60 ∼ 180g	Pe 8 ∼ 12	18kg/45°	OC	DPS20	D	GJ	Gimbal ※	91.3	3.0	15.3	900	S·D:18000~30000 / D:6500~
	73 JAPAN Special		4580397945161	2	S 7f	ft 3in	1515	406	60 ∼ 180g	Pe 8 ∼ 12	18kg/45°	OC	DPS20	D	GJ	Gimbal ※	91.6	3.6	15.1	915	S·D:18000~30000 / D:6500
:	ST 78-3		4580397940081	2	S 7f	ft 8in	1780	224	Com.W 30~50g	MAX Pe 3	5kg/45°	SiC-S/Ti/K	DPS18	D	GJ	EVA	94.7	2.4	12.1	705	S:5000~6000 / D:3500~40
[:	ST 80-4		4580397940098	2	S	8ft	1782	300	Com.W 40~80g	MAX Pe 4	7kg/45°	SiC-S/Ti/K+0C	DPS20	D	GJ	BRC	99.5	2.3	12.7	800	S · D:8000 / D:4500
:	ST 85-6		4580397945093	-	_	ft 5in	1925	338	Com.W 40~110g	MAX Pe 6	12kg/45°	SiC-S/Ti/K+0C	DPS20	D	GJ	BRC	99.2	2.5	14.8	815	S·D:8000~18000 / D:5000~
	EX 79-3		4580397940050	_	_	ft 9in	847	263	Com.W 40~60g	MAX Pe 3	5kg/45°	SiC-S/Ti/K	DPS18	U	Spigot+GJ	EVA	79.2		12.3	•	S:5000~6000 / D:3500~40
	EX 83-6		4580397940074	-		ft 3in	905	353	Com.W 60~120g	MAX Pe 6	_	SiC-S/Ti/K+0C	DPS20	U	Spigot+GJ	BRC	76.2	_	_	930	S · D:14000 / D:5500
Anuila ⊢				_	_			_									_		_	•	
D11	MST 85-7+		4580397945048	-	_	ft 5in	1897	382	Com.W 40~120g	MAX Pe 7	_	SiC-S/Ti/K+0C	DPS20	U	GJ	BRC	_	2.8		840	S·D:14000~18000 / D:5500
	MST 711-8+		4580397945055	_	_	t 11in	1752	369	Com.W 80~180g	MAX Pe 8		SiC-S/Ti/K+0C	DPS20	U	GJ	BRC	_	3.0	_	840	S · D:14000~18000 / D:5500
L!	MLT 82-2/4		4580397940104	-	_	ft 2in	1782	341	Com.W 30~70g	Pe 2 ∼ 4	7kg/45°	SiC-S/Ti/K+0C	DPS20	D	GJ	BRC	83.2	2.4	13.4	870	S:6000~8000 / D:4000~50
	MLT 82-3/6		4580397940111	2	S 8f	ft 2in	1785	348	Com.W 40~90g	Pe 3 ∼ 6	10kg/45°	SiC-S/Ti/K+0C	DPS20	D	GJ	BRC	83.2	2.5	13.8	860	S·D:8000~14000 / D:4500~
1	MLT82-2/4 Short Handle		4580397949985																		
1	MLT82-3/6 Short Handle		4580397949978																		
	FINAL SPIRIT GT78		4580397948926	2	S 71	ft8in	1645	393	MAX 270g	MAX Pe 12	17kg/45°	OC	DPS20	U	GJ	BRC	99.4	3.9	15.0	890	S · D:18000~20000 / D:65
-	Reversal GT 80 Nano		4580397944096	_	_	8ft	1737	373	MAX 170g	MAX Pe 8	14kg/45°	OC	DPS20	U	GJ	BRC	_	3.9	_	885	S·D:14000~18000 / D:5500
	LC GT 82 Nano		4580397944089	_		ft 2in	1796	378	MAX 190g	MAX Pe 8	14kg/45°	OC	DPS20	U	GJ	BRC	99.3	_		880	S·D:14000~18000 / D:5500
110				-		_	_		_		_									1	
	PF GT 711 Nano		4580397944102		_	t 11in	1682	375	MAX 210g	MAX Pe 10	15kg/45°	00	DPS20	U	GJ	BRC		3.8		880	S · D:18000 / D:6500
- h	711ML		4580397944027	-	_		1780	369	MAX 150g	MAX Pe 6	12kg/45°	OC	DPS20	U	GJ	BRC	96.5		_	860	S·D:10000~14000 / D:5000~
UITIMO -	83ML		4580397944058		_	ft 3in	1815	365	MAX 150g	MAX Pe 6	12kg/45°	OC	DPS20	U	GJ	BRC	95.5	_		870	S·D:10000~14000 / D:5000~
P18	79M Nano		4580397944041	-	_	ft 9in	1740	366	MAX 160g	MAX Pe 7	13kg/45°	OC	DPS20	U	GJ	BRC	99.5			835	S·D:10000~14000 / D:5000
, 10	83M Nano		4580397944065	2	S 8f	ft 3in	1835	362	MAX 160g	MAX Pe 7	13kg/45°	OC	DPS20	U	GJ	BRC	99.5	2.7	14.5	860	S·D:10000~18000 / D:5000
[80MH Nano		4580397944034	2	S	8ft	1740	383	MAX 170g	MAX Pe 8	14kg/45°	ОС	DPS20	U	GJ	BRC	99.8	2.9	14.5	870	S·D:14000~18000 / D:5500
	81M		4580397948094	-	_	ft 1in	887	380	MAX 140g	MAX Pe 6	10kg/45°	OC	DPS20	U	Spigot+GJ	BRC	_	3.2	14.3	920	S · D:14000 / D:5500
	81MH		4580397948100		_	ft 1in	887	386	MAX 180g	MAX Pe 8	13kg/45°	OC	DPS20	IJ	Spigot+GJ	BRC		3.9		920	S·D:14000~18000 / D:5500
	NS 632		4580397948117	-	_	ft 3in	1910	126		MAX Pe 3	3kg/45°	SiC-S/Ti/K	DPS18	U		EVA	_	2.0		615	S:5000 / D:3500
_ F					_				Com.W 80~130g		_									-	
- H	NS 623		4580397948124	-	_	ft 2in	1890	159	Com.W 100~150g	MAX Pe 3	5kg/45°	SiC-S/Ti/K	DPS18	U		EVA	_	2.2	_	625	S:5000~8000 / D:3500~4
F	NS 614		4580397948131	_	_	ft 1in	1865	174	Com.W 120~180g	MAX Pe 4	7kg/45°	SiC-S/Ti/K	DPS18	U		EVA		2.1		645	S:6000~8000 / D:4000~4
SELFISH :	SEB 633		4580397948148	-	_	ft 3in	1915	182	Com.W 120~180g	MAX Pe 3	5kg/45°	SiC-S/Ti/K	TCS18	D		EVA		2.4	_	680	S:1500~2000 / D:15~2
P23	SEB 624		4580397948155	1	B 6f	ft 2in	1890	189	Com.W 140~200g	MAX Pe 4	7kg/45°	SiC-S/Ti/K	TCS18	D		EVA	94.7	2.4	8.7	680	S:2000 / D:30~35
	613S Nano		4580397941026	1	S 6f	ft 1in	1860	170	Com.W 100~140g	Pe 2.5 Class	4kg/45°	SiC-S/Ti/K	DPS18	U		EVA	92.5	2.4	8.7	615	S:5000~6000 / D:3500~4
	614S Nano		4580397941033	1	S 6f	ft 1in	1860	180	Com.W 130~170g	Pe 3 Class	5kg/45°	SiC-S/Ti/K	DPS18	U		EVA	92.1	2.5	9.2	635	S:5000~8000 / D:3500~4
[597S Nano		4580397941064	1	S 5f	ft 9in	1756	250	Com.W 180~240g	Pe 5 Class	8kg/45°	SiC-S+SiC/Ti/K	DPS20	U		BRC	99.8	3.1	9.2	735	S·D:8000~10000 / D:4500~
	6615		4580397948964			ft6in	1295	未定	MAX 400g	MAX Pe 6	12kg/45°	OC	DPS20	D	GJ	Gimbal ※				885	S·D:10000~14000
	5930		4580397948957	-		ft9in	1775	未定	MAX 800g	MAX Pe 8	15kg/45°	OC	DPS20	D		Gimbal ※	_		_	815	S·D:10000~20000
	67UL		4580397941125	-		ft 7in	2005	131	MAX 100g	MAX Pe 1		SiC-S/Ti/K	TCS16	D		EVA	89.0			640	S:100~200 / D:100~200
Silapper F			4580397941132	_			_	_						-			_		_	•	S:100~200 / D:100~200
P28 h	65L			-	_	ft 5in	1960	125	MAX 120g	MAX Pe 1.2		SiC-S/Ti/K	TCS16	D		EVA	89.8	_		625	
	66ML		4580397941149	_	_	ft 6in	1475	146	MAX 160g	MAX Pe 1.5		SiC-S/Ti/K	TCS17	D	GJ	EVA	94.7		_	635	S:100~200 / D:100~200
[102M Nano PlugModel		4580397942030	-	_	ft 2in	1590	290	Plug 20 ∼ 70g	Pe 1.5 ~ 3	5kg/45°	SiC-S/Ti/K	DPS20	U	Spigot	BRC	_	2.6		805	S:5000~6000 / D:3500~4
	104H Nano PlugModel		4580397942047	2	S 10	ft 4in	1615	327	Plug 40 ∼ 120g	Pe 4 ∼ 6	8kg/45°	OC	DPS20	U	Spigot	BRC	99.8	2.5	16.7	805	S·D:8000~14000 / D:4500~
:	110H Nano PlugModel		4580397948179	2	S 1	11ft	1720	341	Plug 40 ∼ 130g	Pe 4 ∼ 7	9kg/45°	SiC-S/Ti/K+0C	DPS20	U	Spigot	BRC	99.8	2.6	16.8	795	S·D:8000~14000 / D:4500~
	911MH Nano		4580397942016	2	S 9ft	t 11in	1560	306	MAX Jig 100g/MAX Plug 80g	MAX Pe 4	6kg/45°	SiC-S/Ti/K+OC	DPS20	U	Spigot	BRC	99.8	3.0	17.1	730	S:6000~8000 / D:4000~4
nnerExceed	103H		4580397942023	2	S 10	ft 3in	1615	327	MAX Jig 130g/MAX Plug 90g	MAX Pe 5	8kg/45°	SiC-S/Ti/K+OC	DPS20	U	Put over	BRC	99.3	3.1	17.4	765	S·D:8000~14000 / D:4500~
P33	107BH Nano		4580397940012	-	_	ft 7in	1650	374	50 ~ 130g	MAX Pe 6	8kg/45°	OC	T-DPS22	D	Spigot	BRC	97.3	28	17.2	830	S:LD8~10 / D:LD20~30 / SC
	100SHH LIMITED		4580397948292	-	_	10ft	1579	405	MAX 150g	MAX Pe 8	10kg/45°	OC	DPS22	D	Spigot	BRC	_	-	-	885	S·D:14000~18000 / D:5500
				-	_						_			_			_	_	_	-	
	FINAL STAND UP 100SXH		4580397942061	_	_	10ft	1570	439	MAX 160g	MAX Pe 10	10kg/45°	OC	DPS22	D		BRC	_	_	_	875	S:14000~20000 / D:5500~
	FINAL STAND UP 105BXH		4580397942078	_		ft 5in	1626	429	MAX 180g	MAX Pe 10	10kg/45°	OC	T-DPS22	D	Spigot	BRC	99.8			830	D:LD30~50 / AV:MCLX6/ SOM
	113HH-4pcs		4580397948940	_		lft3in	900	320	MAX 70g	MAX Pe 3		SiC-S/Ti/K	DPS20	D	Spigot	BRC	99.8	2.5	16.9	675	S:5000~6000 / D:3500~4
9	91BH		4580397948933	2	B 91	ft1in	1428	212	20 ∼ 130 g	MAX Pe 5		SiC-S/Ti/K	TCS18	D	Spigot	EVA	99.8	2.5	13.8	670	S:200~400 / D:1500~400
nsterImpact [90H		4580397948018	2	S	9ft	1410	193	18 ∼ 70g	MAX Pe 3		SiC-S/Ti/KX	DPS18	U	Spigot	EVA	99.8	2.3	14.1	575	S:4000~5000 / D:LT4000C~
· · F	101HH Nano		4580397942122	2	S 10	ft 1in	1585	270	MAX 60g	MAX Pe 3		SiC-S/Ti/K	DPS20	D	Spigot	BRC	99.8	2.5	16.7	660	S:5000~6000 / D:3500~4
	110HH / S		4580397942115	-		1ft	1735	274	MAX 60g	MAX Pe 3		SiC-S/Ti/K	DPS20		Put over	BRC	_	_	16.3	•	S:5000~6000 / D:3500~4
	110HH HIRA / B		4580397942139		-	1ft	1735	270	MAX 70g	BEST Pe 2.5		SiC-S/Ti/K	TCS18	D	Put over	BRC		2.6		700	S:200~300 / D:1500~200
	103M Nano		4580397942085	-		ft 3in	1600	198	MAX 40g	MAX Pe 1.5		SiC-S/Ti/K	DPS18	D	Spigot	EVA	_	2.1	_	620	S:4000~5000 / D:LT5000C~
Accession 1					_													_		-	S:4000~5000 / D:LT5000C~
	106MH Nano		4580397942092	-	_	ft 6in	1640	219	MAX 50g	MAX Pe 2		SiC-S/Ti/K	DPS20	D	Spigot	EVA	_	2.2	_	655	
D40 "			450000000000000000000000000000000000000			l1ft	1730	253	MAX 60g	MAX Pe 2.5		SiC-S/Ti/K	DPS20	D	Spigot	EVA	_	_	16.9	-	S:4000~5000 / D:LT5000C~
	110H Nano		4580397942108				_									E 1 / A	0.00	120	15.8	635	S:4000~5000 / D:LT5000C~
	110H Nano 110M Nano		4580397948162	2	S 1	l1ft	1726	213	MAX 40g	MAX Pe 2		SiC-S/Ti/K	DPS18	D	Spigot	EVA					S:4000~5000 / D:LT40000C~
	110H Nano		4580397948162 4580397940036	2	S 1 S 10	1ft ft 6in	_	213 220	MAX 40g 30 ~ 50g	MAX Pe 2 MAX Pe 1.5		SiC-S/Ti/K SiC-S/Ti/K	DPS18 DPS20	_		EVA			14.7	695	011000 00007 BIE1100000
	110H Nano 110M Nano		4580397948162	2	S 1 S 10	1ft ft 6in	1726	_						D	_		99.6	2.3		695 725	
	110H Nano 110M Nano 106 Northern Nano		4580397948162 4580397940036	2 2 2	S 10 S 11	1ft ft 6in	1726 1640	220	30 ~ 50g	MAX Pe 1.5		SiC-S/Ti/K	DPS20	D	Spigot	EVA	99.6 97.8	2.3	14.7	+	S:4000~5000 / D:LT40000C~
wortraam	110H Nano 110M Nano 106 Northern Nano 112 Northern 81 Stiletto		4580397948162 4580397940036 4580397940029 4580397949992	2 2 2 2	S 10 S 11 S 8f	1ft Ift 6in Ift 2in Ift 1in	1726 1640 1754 1275	220 255	30 ~ 50g 30 ~ 60g 7~28g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17	D D	Spigot Put over	EVA EVA	99.6 97.8 99.7	2.3	14.7 10.5	725 465	S:4000~5000 / D:LT40000C~ S:2500~4000 / D:LT2500~4
verStream	110H Nano 110M Nano 106 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano		4580397948162 4580397940036 4580397940029 4580397949992 4580397942627	2 2 2 2 2	S 10 S 11 S 8f S 8ft	Ift Ift 6in Ift 2in Ift 1in Ift 10in	1726 1640 1754 1275 1400	220 255 126 160	30 ~ 50g 30 ~ 60g 7~28g MAX 32g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17 DPS18	D D D	Spigot Put over Spigot Spigot	EVA EVA EVA	99.6 97.8 99.7 97.1	2.3 2.4 1.9 1.9	14.7 10.5 12.9	725 465 510	S:4000~5000 / D:LT40000C~ S:2500~4000 / D:LT2500~4 S:3000~4000 / D:LT2500~4
verStream	110H Nano 110M Nano 106 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano		4580397948162 4580397940036 4580397940029 4580397949992 4580397942627 4580397942634	2 2 2 2 2 2 2	S 10 S 10 S 11 S 8f S 8ft S 9f	Ift of the fit of the	1726 1640 1754 1275 1400 1490	220 255 126 160 166	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18	D D D D	Spigot Put over Spigot Spigot Spigot	EVA EVA EVA EVA	99.6 97.8 99.7 97.1 97.0	2.3 2.4 1.9 1.9 2.4	14.7 10.5 12.9 13.1	725 465 510 555	\$:4000~5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~
verStream P45	110H Nano 110M Nano 106 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano		4580397948162 4580397940036 4580397940029 4580397949992 4580397942627 4580397942634 4580397942641	2 2 2 2 2 2 2 2	S 10 S 11 S 8f S 8ft S 9f S 10	1ft Ift 6in Ift 2in Ift 1in It 10in Ift 6in	1726 1640 1754 1275 1400 1490 1605	220 255 126 160 166 196	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5	 	SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18	D D D D D	Spigot Put over Spigot Spigot Spigot Spigot Spigot	EVA EVA EVA EVA EVA	99.6 97.8 99.7 97.1 97.0 96.8	2.3 2.4 1.9 1.9 2.4 2.1	14.7 10.5 12.9 13.1 14.3	725 465 510 555 595	\$:4000~5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~
verStream	110H Nano 110M Nano 106 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 87 RED EYE Nano		4580397948162 4580397940036 4580397940029 4580397949992 4580397942627 4580397942634 4580397942641 4580397942603	2 2 2 2 2 2 2 2 2 2	S 10 S 10 S 11 S 8f S 8ft S 9f S 10 S 8f	Inft off 6in off 2in off 1in off 1in off 6in off 3in off 7in off 7in off 7in off 7in off 7in off 6in off 7in off 7in off 6in off 7in off 7in off 6in off 7in o	1726 1640 1754 1275 1400 1490 1605 1350	220 255 126 160 166 196 158	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18	D D D D U	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot	EVA EVA EVA EVA EVA EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7	2.3 2.4 1.9 1.9 2.4 2.1 2.0	14.7 10.5 12.9 13.1 14.3 13.2	725 465 510 555 595 555	\$:4000-5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~
verStream	110H Nano 110M Nano 106 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 87 RED EYE Nano 97 RED EYE Nano		4580397948162 4580397940036 4580397940029 4580397949992 4580397942627 4580397942634 4580397942641 4580397942603 4580397942610	2 2 2 2 2 2 2 2 2 2	S 10 S 10 S 11: S 8f S 8ft S 9f S 10: S 9f	Inft off 6in off 2in off 1in off 6in off 3in off 7in o	1726 1640 1754 1275 1400 1490 1605 1350 1505	220 255 126 160 166 196 158 193	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g MAX 45g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2 MAX Pe 2.5		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 DPS18	D D D U U	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Spigot	EVA EVA EVA EVA EVA EVA EVA EVA EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0	14.7 10.5 12.9 13.1 14.3 13.2 14.9	725 465 510 555 595 555 585	\$:4000-5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~
verStream P45	110H Nano 110M Nano 106 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 87 RED EYE Nano 97 RED EYE Nano RC-55 / S		4580397948162 4580397940036 4580397940029 4580397949992 4580397942627 4580397942634 4580397942641 4580397942610 4580397942610	2 2 2 2 2 2 2 2 2 2 2 2 2	S 10 S 10 S 11 S 8f S 8ft S 9f S 10 S 8f S 9f S 5 9f	Ift Ift 6in ft 2in ft 1in t 10in ft 6in Ift 3in ft 7in ft 5in	1726 1640 1754 1275 1400 1490 1605 1350 1505 853	220 255 126 160 166 196 158 193 54	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g MAX 45g JH 0.2 ~ 3g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2 MAX Pe 2.5 Pe 02~0.4/FC · NY ~3lb		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 DPS18 VSS16	D D D U U U	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Put over	EVA EVA EVA EVA EVA EVA EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 99.7	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5	725 465 510 555 595 555 585 290	\$:4000-5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~
verStream P45	110H Nano 110M Nano 106 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 87 RED EYE Nano 97 RED EYE Nano		4580397948162 4580397940036 4580397940029 4580397949992 4580397942627 4580397942634 4580397942641 4580397942603 4580397942610	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	\$ 10 \$ 10 \$ 11 \$ 8f \$ 8f \$ 9f \$ 10 \$ 9f \$ 5 6f	Inft off 6in off 2in off 1in off 6in off 3in off 7in o	1726 1640 1754 1275 1400 1490 1605 1350 1505	220 255 126 160 166 196 158 193	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g MAX 45g JH 0.2 ~ 3g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2 MAX Pe 2.5		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 DPS18	D D D U U U	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Spigot	EVA EVA EVA EVA EVA EVA EVA EVA EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 99.7 91.1	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3 1.4	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5	725 465 510 555 595 555 585	\$:4000-5000 / D:LT40000C~ \$:2500~4000 / D:LT2500-4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~
verStream P45	110H Nano 110M Nano 106 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 87 RED EYE Nano 97 RED EYE Nano RC-55 / S		4580397948162 4580397940036 4580397940029 4580397949992 4580397942627 4580397942634 4580397942641 4580397942610 4580397942610	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	S 10 S 10 S 111 S 8ft S 9ft S 10 S 8ft S 9ft S 9ft S 6f	Ift Ift 6in ft 2in ft 1in t 10in ft 6in Ift 3in ft 7in ft 5in	1726 1640 1754 1275 1400 1490 1605 1350 1505 853	220 255 126 160 166 196 158 193 54	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g MAX 45g JH 0.2 ~ 3g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2 MAX Pe 2.5 Pe 02~0.4/FC · NY ~3lb		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 DPS18 VSS16	D D D U U U U	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Put over	EVA EVA EVA EVA EVA EVA EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 99.7 91.1	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5 7.8	725 465 510 555 595 555 585 290	\$:4000-5000 / D:LT40000C~ \$:2500~4000 / D:LT2500-4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~ \$:1000~2000 / D:LT1000~
verStream P45	110H Nano 110M Nano 106 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 97 RED EYE Nano 97 RED EYE Nano RC-55 / S RC-65 / S		4580397948162 4580397940036 4580397940029 4580397949992 4580397942627 4580397942634 4580397942610 4580397942610 4580397948216 4580397948223	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	S 10 S 10 S 11: S 8f S 8ft S 9f S 10 S 8f S 9f S 7f	Inft Ift 6in Ift 2in Ift 1in Ift 10in Ift 6in Ift 3in Ift 7in Ift 7in Ift 5in Ift 5in	1726 1640 1754 1275 1400 1490 1605 1350 1505 853 1004	220 255 126 160 166 196 158 193 54 61	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g MAX 45g JH 0.2 ~ 3g JH 0.3-6g/Plug 1.8-45g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2.5 MAX Pe 2.5 Pe 0.2~0.4/FC · NY ~3lb Pe 0.2~0.4/FC · NY ~3lb		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 DPS18 VSS16	D D D D U U U U U	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Put over	EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 99.7 91.1	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3 1.4 1.5	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5 7.8 10.0	725 465 510 555 595 555 585 290 335	\$:4000-5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~ \$:1000~2000 / D:LT1000~ \$:2000~2500 / D:LT1000~
verStream P45	110H Nano 110M Nano 110M Nano 110 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 97 RED EYE Nano RC-55 / S RC-65 / S RC-75 / S RC-81 / S		4580397948162 4580397940036 4580397940029 458039794092 4580397942627 4580397942641 4580397942610 4580397942610 4580397942610 4580397948216 4580397948223 4580397948230 4580397948230	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	S 10 S 10 S 11: S 8f S 8ft S 9f S 10 S 8f S 9f S 5f S 9f S 5f S 8f	Inft Ifft 6in Ifft 2in Ifft 1in Ifft 1in Ifft 3in Ifft 3in Ifft 7in Ifft 5in	1726 1640 1754 1275 1400 1490 1605 1350 1505 853 1004 1157 1265	220 255 126 160 166 196 158 193 54 61 79	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 45g JH 0.2 ~ 3g JH 0.3 ~ 6g/Plug 1.8 ~ 45g Rig 2~14g/Plug 2.5 ~ 11g 2 ~ 17g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2.5 MAX Pe 2.5 Pe 0.2~0.4/FC · NY ~3lb Pe 0.3 ~ 0.8 Pe 0.4 ~ 0.8		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 VSS16 VSS16 VSS16 VSS16	D D D D U U U U U U U	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Put over Put over	EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 91.1 91.6 99.8 97.4	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3 1.4 1.5	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5 7.8 10.0	725 465 510 555 595 555 585 290 335 385 395	\$:4000-5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~ \$:1000~2000 / D:LT1000~ \$:2000~2500 / D:LT1000~
verStream P45	110H Nano 110M Nano 110M Nano 110 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 97 RED EYE Nano RC-55 / S RC-65 / S RC-75 / S RC-81 / S RC-57 / B		4580397948162 4580397940036 4580397940029 458039794092 4580397942627 4580397942641 4580397942610 4580397948216 4580397948216 4580397948216 4580397948223 4580397948230 4580397948230	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	S 10 S 10 S 11 S 8ft S 8ft S 9ft S 9 9ft S 9	talft ft ft fin ft zin ft zin ft lin t lin t lin ft sin ft sin ft sin ft ft fin	1726 1640 1754 1275 1400 1490 1605 1350 1505 853 1004 1157 1265 876	220 255 126 160 166 196 158 193 54 61 79 86	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g MAX 45g JH 0.2 ~ 3g JH 0.3 -6g/Plug 18-45g Rig 2-14g/Plug 25-11g 2 ~ 17g 0.5 ~ 5g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2.5 MAX Pe 2.5 Pe 0.2~0.4/FC · NY ~3lb Pe 0.3 ~ 0.8 Pe 0.4 ~ 0.8 Pe 0.2 ~ 0.5		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 VSS16 VSS16 VSS16 VSS16 PMTS17	D D D D U U U U D D	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Put over Put over Put over Put over	EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 91.1 91.6 99.8 97.4	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3 1.4 1.5 1.5	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5 7.8 10.0 10.5 6.9	725 465 510 555 595 585 290 335 385 395	\$:4000-5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~ \$:1000~2000 / D:LT1000~ \$:1000~2000 / D:LT1000~ \$:2000~2500 / D:LT2000~ \$:2000~2500 / D:LT2000~ \$:2000~2500 / D:LT2000~ Bait reel for finesse
P45 alCrescent	110H Nano 110M Nano 110M Nano 110 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 97 RED EYE Nano 97 RED EYE Nano RC-55 / S RC-65 / S RC-75 / S RC-81 / S RC-57 / B RC-67 / B		4580397948162 4580397940036 4580397940029 458039794092 4580397942634 4580397942641 4580397942603 4580397942613 4580397948216 4580397948223 458039794823 458039794823 4580397948247 4580397948247 4580397948247	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	S 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1.1ft fft 6in fft 2in fft 2in fft 1in t 10in fft 6in fft 3in fft 7in fft 5in fft 5in fft 5in fft 7in fft 7in fft 7in fft 7in	1726 1640 1754 1275 1400 1490 1605 1350 1505 853 1004 1157 1265 876 1025	220 255 126 160 166 196 158 193 54 61 79 86 69 78	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g MAX 45g JH 0.2 ~ 3g JH 0.3-6g/Plug 18-45g Rig 2-14g/Plug 25-11g 2 ~ 17g 0.5 ~ 5g 0.8 ~ 8g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2.5 MAX Pe 2.5 Pe 0.2~0.4/FC · NY ~3lb Pe 0.3~0.8 Pe 0.4~0.8 Pe 0.2~0.5 Pe 0.3~0.6		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K	DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 VSS16 VSS16 VSS16 VSS16 PMTS17 PMTS17	D D D D U U U U D D D	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Put over Put over Put over Put over Put over Put over	EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 91.1 91.6 99.8 97.4 91.6 91.7	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3 1.4 1.5 1.3	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5 7.8 10.0 10.5 6.9 8.3	725 465 510 555 595 555 585 290 335 385 395 325	\$:4000~5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~ \$:1000~2000 / D:LT1000~ \$:2000~2500 / D:LT2000~ \$:2000~2500 / D:LT2000~ \$:2000~2500 / D:LT2000~ Bait reel for finesse Bait reel for finesse
P45 alCrescent	110H Nano 110M Nano 110M Nano 110 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 97 RED EYE Nano RC-55 / S RC-65 / S RC-75 / S RC-81 / S RC-57 / B		4580397948162 4580397940036 4580397940029 458039794092 4580397942627 4580397942641 4580397942610 4580397948216 4580397948216 4580397948216 4580397948223 4580397948230 4580397948230	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	S 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1.1ft fft 6in fft 2in fft 2in fft 1in t 10in fft 6in fft 3in fft 7in fft 5in fft 5in fft 5in fft 7in fft 7in fft 7in fft 7in	1726 1640 1754 1275 1400 1490 1605 1350 1505 853 1004 1157 1265 876	220 255 126 160 166 196 158 193 54 61 79 86 69 78	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 45g JH 0.2 ~ 3g JH 0.3 ~ 6g/Plug 1.8 - 45g Rig 2-14g/Plug 2.5 - 11g 2 ~ 17g 0.5 ~ 5g 0.8 ~ 8g 2 ~ 15g	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2.5 MAX Pe 2.5 Pe 0.2~0.4/FC · NY ~3lb Pe 0.3 ~ 0.8 Pe 0.4 ~ 0.8 Pe 0.2 ~ 0.5		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 VSS16 VSS16 VSS16 VSS16 PMTS17	D D D D U U U U D D D	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Put over Put over Put over Put over Put over Put over	EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 91.1 91.6 99.8 97.4 91.6 91.7	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3 1.4 1.5 1.3	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5 7.8 10.0 10.5 6.9 8.3	725 465 510 555 595 585 290 335 385 395	\$:4000~5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~ \$:1000~2000 / D:LT1000~ \$:2000~2500 / D:LT2000~ \$:2000~2500 / D:LT2000~ Bait reel for finesse Bait reel for finesse For finesse and small bait reels
verStream P45 alCrescent P49	110H Nano 110M Nano 110M Nano 110 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 97 RED EYE Nano 97 RED EYE Nano RC-55 / S RC-65 / S RC-75 / S RC-81 / S RC-57 / B RC-67 / B RC-77 / B	JAN G	4580397948162 4580397940036 4580397940029 458039794092 4580397942634 4580397942634 4580397942610 4580397942610 4580397948216 4580397948230 4580397948234 4580397948247 4580397948247 4580397948261	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	S 1 10 S 10 S 11 S 8 F 10 S 10 S 11 S 8 F 10 S 10	11ft (ff 6in ff 2in ff 1in th 10in th 10in ff 6in ff 7in ff 7in ff 5in ff 5in ff 5in ff 7in	1726 1640 1754 1275 1400 1490 1605 1350 1505 853 1004 1157 1265 876 1025 1190	220 255 126 160 166 196 158 193 54 61 79 86 69 78 92	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g MAX 45g JH 0.2 ~ 3g JH 0.3-6g/Plug 18-45g Rig 2-14g/Plug 25-11g 2 ~ 77g 0.5 ~ 5g 0.8 ~ 8g 2 ~ 15g Doon tip Recomme	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2.5 MAX Pe 2.5 Pe 0.2~0.4/FC · NY ~3/b Pe 0.3 ~ 0.8 Pe 0.4 ~ 0.8 Pe 0.2 ~ 0.5 Pe 0.3 ~ 0.6 Pe 0.4 ~ 0.8		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K	DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 VSS16 VSS16 VSS16 VSS16 PMTS17 PMTS17	D D D D U U U D D D D D D D D D D D D D	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Put over	EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 91.1 91.6 99.8 97.4 91.6 91.7 99.6	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3 1.4 1.5 1.3 1.3	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5 7.8 10.0 10.5 6.9 8.3 10.2	725 465 510 555 595 585 290 335 385 395 390 415	\$:4000-5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~ \$:2000~2500 / D:LT2000~ \$:2000~2500 / D:LT2000~ \$:2000~2500 / D:LT2000~ Bait reel for finesse Bait reel for finesse For finesse and small bait reels \$\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$
verStream P45	110H Nano 110M Nano 110M Nano 110 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 97 RED EYE Nano RC-55 / S RC-65 / S RC-75 / S RC-81 / S RC-57 / B RC-67 / B RC-77 / B Item Price	JAN C	4580397948162 4580397940029 4580397940029 4580397940922 4580397942634 4580397942634 4580397942610 4580397942610 4580397948216 4580397948230 4580397948247 4580397948254 4580397948261 4580397948261	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	S 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	In the state of th	1726 1640 1754 1275 1400 1490 1605 1350 1505 853 1004 1157 1265 876 1025 1190	220 255 126 160 166 196 158 193 54 61 79 86 69 78 92	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g MAX 45g JH 0.2 ~ 3g JH 0.3-6g/Plug 1.8-45g Rig 2-14g/Plug 2.5-11g 2 ~ 17g 0.5 ~ 5g 0.8 ~ 8g 2 ~ 15g Denon tip Secomber Ampoon	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2.5 MAX Pe 2.5 Pe 0.2~0.4/FC · NY ~3lb Pe 0.3 ~ 0.8 Pe 0.4 ~ 0.8 Pe 0.2 ~ 0.5 Pe 0.3 ~ 0.6 Pe 0.3 ~ 0.6 Pe 0.4 ~ 0.8		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K	DPS20 DPS20 DPS17 DPS18 DPS18 DPS18 DPS18 DPS18 VSS16 VSS16 VSS16 VSS16 PMTS17 PMTS17	D D D D U U U U D D D D D D D D D D D D	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Spigot Spigot Put over	EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 91.6 99.8 97.4 91.6 91.7 99.6	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3 1.4 1.5 1.3 1.5	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5 7.8 10.0 10.5 6.9 8.3 10.2	725 465 510 555 595 585 290 335 385 395 390 415	\$:4000~5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~ \$:2000~2000 / D:LT1000~ \$:2000~2500 / D:LT2000~ \$:2000~2500 / D:LT2000~ \$:2000~2500 / D:LT2000~ \$:4000~2500 / D:LT2000~ \$:40000~2500 / D:LT2000~ \$:4000000000000000000000000000000000000
verStream P45	110H Nano 110M Nano 110M Nano 110 Northern Nano 112 Northern 81 Stiletto 810 Flows Nano 96 Flows Nano 103 Flows Nano 97 RED EYE Nano 97 RED EYE Nano RC-55 / S RC-65 / S RC-75 / S RC-81 / S RC-57 / B RC-67 / B RC-77 / B	JAN C 4580397 4580397	4580397948162 4580397940036 4580397940029 458039794092 4580397942627 4580397942611 4580397942611 4580397948216 4580397948230 4580397948247 4580397948254 4580397948278 ODE Sec St. 1222	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	S 1 10 S 10 S 11 S 8 F 10 S 10 S 11 S 8 F 10 S 10	Lift Lift Lift Lift Lift Lift Lift Lift	1726 1640 1754 1275 1400 1490 1605 1350 1505 853 1004 1157 1265 876 1025 1190	220 255 126 160 166 196 158 193 54 61 79 86 69 78 92 harpiscrew W	30 ~ 50g 30 ~ 60g 7~28g MAX 32g MAX 38g MAX 42g MAX 40g MAX 45g JH 0.2 ~ 3g JH 0.3-6g/Plug 18-45g Rig 2-14g/Plug 25-11g 2 ~ 77g 0.5 ~ 5g 0.8 ~ 8g 2 ~ 15g Doon tip Recomme	MAX Pe 1.5 MAX Pe 1.5 Pe 0.6~1.2 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 1.5 MAX Pe 2.5 Pe 0.2~0.4/FC · NY ~3lb Pe 0.2~0.4/FC · NY ~3lb Pe 0.3 ~ 0.8 Pe 0.4 ~ 0.8 Pe 0.3 ~ 0.6 Pe 0.4 ~ 0.8 Multi Sh		SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K TZ/Ti/K SiC-S/Ti/K SiC-S/Ti/K TZ/Ti/K	DPS20 DPS20 DPS27 DPS18 DPS18 DPS18 DPS18 DPS18 VSS16 VSS16 VSS16 VSS16 PMTS17 PMTS17	D D D D U U U U U D D D D D D D D D D D	Spigot Put over Spigot Spigot Spigot Spigot Spigot Spigot Spigot Put over	EVA	99.6 97.8 99.7 97.1 97.0 96.8 99.7 91.1 91.6 99.8 97.4 91.6 91.7 99.6	2.3 2.4 1.9 1.9 2.4 2.1 2.0 2.0 1.3 1.4 1.5 1.3 1.3 1.5	14.7 10.5 12.9 13.1 14.3 13.2 14.9 6.5 7.8 10.0 10.5 6.9 8.3 10.2	725 465 510 555 595 595 290 335 385 395 415 415	\$:4000~5000 / D:LT40000C~ \$:2500~4000 / D:LT2500~4 \$:3000~4000 / D:LT2500~4 \$:3000~4000 / D:LT4000C~ \$:3000~4000 / D:LT4000C~ \$:3000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:4000~5000 / D:LT4000C~ \$:1000~2000 / D:LT1000~ \$:2000~2500 / D:LT2000~ Bait reel for finesse Bait reel for finesse For finesse and small bait reels [Im] Butt [Im] [Im] [Im] [Im] [Im] [Im] [Im] [Im]

Grip end/ BRC=Rubber material Cap EVA=EVA resin material Cap Lock nut/U=Up lock D=Down lock Joint/Spigot=Spigot Ferrule Put over=Put over Ferrule 1&H=Grip Joint T-Type=Telescopic Type Tip[mm]/Diameter of just below top guide Butt(mm)&Position(mm) Position(mm) stand for the length from end of grip to point that is measured for Butt(mm)

**SIC-Sring" is up dated model of SIC guide. Some of RippleFisher products are currently on switching from SIC guide to SIC-S ring guide. Depend on products, there SIC models and SIC-S ring models are existed in the market Please understand that we do not accept exchange to rod with other type of guide ring.



After Service & Support

Precautions for use

Do not cast with tangled line or line trouble in the reel. This may cause the rod to break. Furthermore, if you miss or forget to put the line through a guide, this may result in damage or breakage of your

If you continue to reel in your rig (lure, popper, jig etc) after it has reached the top guide, this will cause the rod to break.

Beware of power cables, overhead power lines or phone lines. The material (carbon) will easily pass through electricity causing serious injury or death.

If you hear or see lightning approaching while in use, pack the rod away or stay away from the rod. Lightning may strike causing serious injury or death.

About joint section of rod

The joint section of rod of Ripple Fisher has been adjusted with high precision. If ferrule wax have been put on or connect rods without wiping salt water off, might cause of fixation. Please make sure that fouling or moistures are wiped off when you connect.

• If you force the joint section of the rod when joining together, this will cause cracking or splitting of the joints. If you use the rod while the joint section is still loose, this may cause

orearage.

If the joint section is stuck together, use a rubber sheet for added grip while twisting away from each other.

Maintenance and storage

Wash rod with running water to rid of any filth and salt. Then wipe off any excess water.

off any excess water. If you store your rod without wiping off excess water, this may cause blisters on the blank. Storage in well ventilated are as with no high

temperature.

Please do not leave the rod in your vehicle for long durations in summer. This will cause blisters and warping of the blank.

Contents in this catalog

• Include accurate specifications of rods, written in accordance with the regulations set by the Japanese National Fishing Rod Fair Trade

Conference.

Prices and specifications listed on this catalog maybe altered without warning.

The colors presented in the pictures may differ from the actual color.

Furthermore, some products are prototype rods in the developmental stage and may differ when it reaches the final product.

Requesting repairs

Please be ware that personally modified rods will not be covered by warranty (even if it is within the warranty period).

● If you are requesting for repair, please send in the whole rod (not just the section of the breakage).



Ripple Co.,LTD (Ripple Fisher)

945 Obaru, Yamaga City, Kumamoto Pref. 861-0543 JAPAN

E-mail: info@ripplefisher.com

https://ripplefisher.com/

















%Please note and look out for our news on Limited Edition or Limited production run for certain models and all these can be found in our English website (Staff blog), facebook news feed or production news.